

Light Propagation Controlled in Photonic Chips: Major Breakthrough in Telecommunications Field

ScienceDaily (July 10, 2011) — Researchers at Columbia Engineering School have built optical nanostructures that enable them to engineer the index of refraction and fully control light dispersion.

They have shown that it is possible for light (electromagnetic waves) to propagate from point A to point B without accumulating any phase, spreading through the artificial medium as if the medium is completely missing in space. This is the first time simultaneous phase and zero-index observations have been made on the chip-scale and at the infrared wavelength.


The study, to be published in *Nature Photonics*, was led by Chee Wei Wong, associate professor of mechanical engineering, and Serdar Kocaman, electrical engineering PhD candidate, both at Columbia Engineering, in collaboration with scientists at the University College of London, Brookhaven National Laboratory, and the Institute of Microelectronics of Singapore.

"We're very excited about this. We've engineered and observed a metamaterial with zero refractive index," said Kocaman. "What we've seen is that the light disperses through the material as if the entire space is missing. The oscillatory phase of the electromagnetic wave doesn't even advance such as in a vacuum -- this is what we term a zero-phase delay."

This exact control of optical phase is based on a unique combination of negative and positive refractive indices. All natural known materials have a positive refractive index. By sculpturing these artificial subwavelength nanostructures, the researchers were able to control the light dispersion so that a negative refractive index appeared in the medium. They then cascaded the negative index medium with a positive refractive index medium so that the complete nanostructure behaved as one with an index of refraction of zero.

"Phase control of photons is really important," said Wong. "This is a big step forward in figuring out how to carry information on photonic chips without losing control of the phase of the light."

"We can now control the flow of light, the fastest thing known to us," he continued. "This can enable

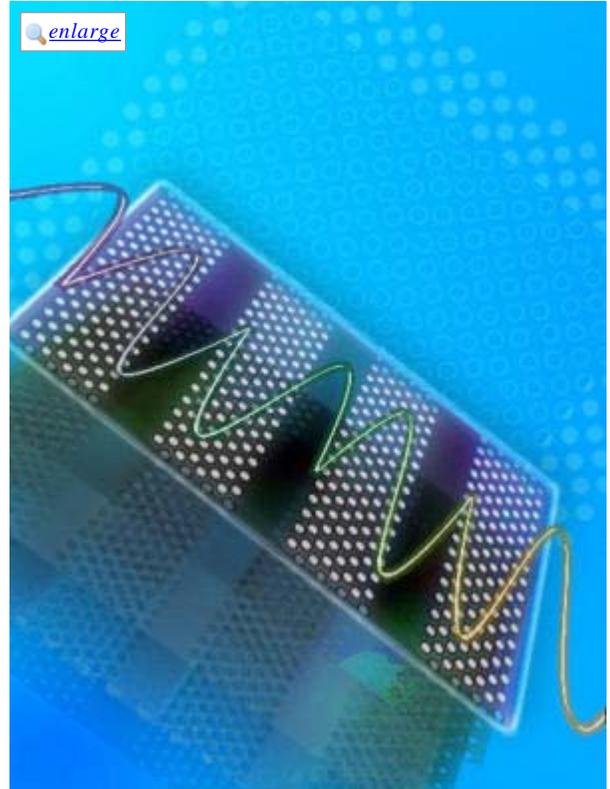

The nanofabricated superlattices consist of alternating stacks of negative index photonic crystals and positive index homogeneous dielectric media have zero phase delay despite the varying physical path. (Credit: Designer: Nicoletta Barolini)

self-focusing light beams, highly directive antennas, and even potentially an approach to cloak or hide objects, at least in the small-scale or a narrow band of frequencies currently."

This research was supported by grants from the National Science Foundation and the Defense Advanced Research Projects Agency.

Email or share this story:

| [More](#)

Story Source:

The above story is reprinted (with editorial adaptations by *ScienceDaily* staff) from materials provided by [Columbia University](#), via [EurekAlert!](#), a service of AAAS.

Journal Reference:

1. S. Kocaman, M. S. Aras, P. Hsieh, J. F. McMillan, C. G. Biris, N. C. Panoiu, M. B. Yu, D. L. Kwong, A. Stein, C. W. Wong. **Zero phase delay in negative-refractive-index photonic crystal superlattices.** *Nature Photonics*, 2011; DOI: [10.1038/nphoton.2011.129](https://doi.org/10.1038/nphoton.2011.129)

Need to cite this story in your essay, paper, or report? Use one of the following formats:

APA

MLA

Columbia University (2011, July 10). Light propagation controlled in photonic chips: Major breakthrough in telecommunications field. *ScienceDaily*. Retrieved July 11, 2011, from <http://www.sciencedaily.com/releases/2011/07/110710132825.htm>

Note: If no author is given, the source is cited instead.

Disclaimer: *Views expressed in this article do not necessarily reflect those of ScienceDaily or its staff.*